




TABANNIROO CO.

DENA POWER LINE INSULATORS

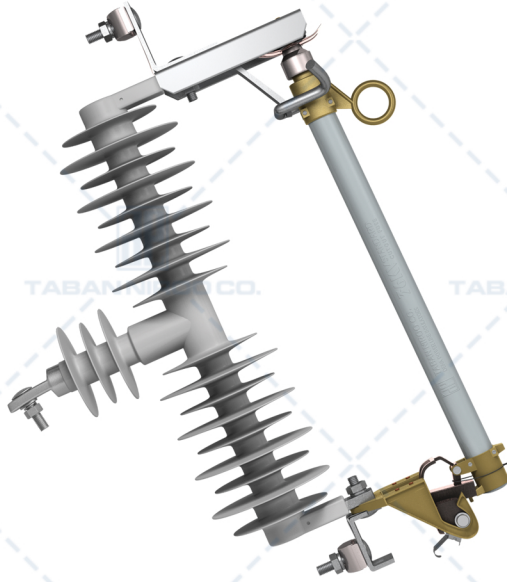

CUTOUT FUSES

Nominal System Voltage KV		20	33
Maximum Design Voltage KV		24	36
Rated Current A		100	100
Breaking A		6000	6000
Impulse Voltage (BIL) KV		145	170
power frequency withstand voltage KV		60	70
Leakage To Ground metal to metal	UP(mm)	975	1150
	Down(mm)	975	1150
leakage distance mm		1450	1850
Weight Kg		5.150	5.750



According to IEC60282-2 (2008) & IEC62217 (2005)